

PRODUCT DATA SHEET

Gentworks

GRP Drinking Fountain - Wall Mounted With Undershroud

Product code **GWDF02**

This wall mounted drinking fountain is constructed from Glass Fibre Reinforced Polyester Resin, the same tough material often used for boat hulls. The smooth gel-coat finish is resistant to staining and damage as well as easy to clean, without the need for strong cleaning products. The drinking fountain is also corrosion resistant making it more suitable than stainless steel for chlorine or salt water environments. It can be installed at adult or junior height. The shielded bubbler valve is positioned for ease of use and the smooth radiused design eliminates sharp corners which could cause injury. It comes with a half-height undershroud to conceal the water supply and waste connections and bottom panel to discourage access to these service. Each drinking fountain is supplied with a 32mm flush grated waste fitting and a chrome plated shielded bubbler (or swan-neck bottle filler) complete with a self-closing push button valve. The valve incorporates a flow adjuster and strainer and is supplied with a water inlet fitting to suit 15mm diameter pipe-work.



GWDF02 Drinking Fountain

Dispenser type option: standard bubbler valve with the option to add a self-closing push button valve fitted with a 255mm high, chrome plated, fixed brass swan-neck spout. Water only flows whilst the button is depressed.




Colour options: Grey Granite or White



Dimensions:

Width: 300mm
Depth: 350mm (projection from wall)
Height: 300mm (including 75mm high rear upstand)
Material Thickness: 9mm

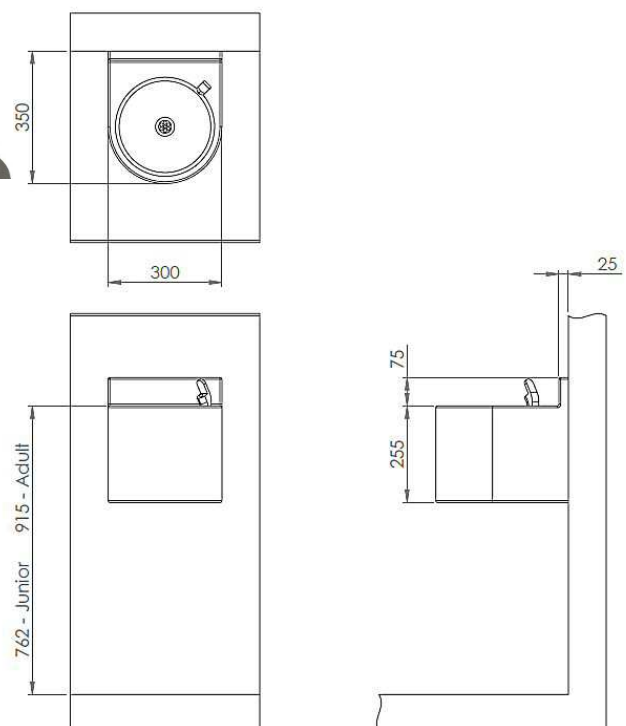

For more details, please contact us:

email: support@gentworks.co.uk

Tel: 0345 202 4535 or 01844 353 210

Gentworks Ltd

The Barn, Emmington

OX39 4AA, England