



Solid Surface WC Pan with Integrated Seat Installation Guide

IMPORTANT NOTES


Read instructions carefully before attempting installation.
These instructions provide a general guide only as specific installation conditions may vary.
Installation requires 2 persons.
Heavy product: Safe lifting procedure should be followed.
Standard MAX 45kg. Corner Units MAX 55kg.
Unpack the product carefully to avoid damage.
Check the product for damage and defects prior to installation.
Do not place the product on abrasive or gritty surfaces to avoid damage.
For best flushing results use a full length flush pipe where possible.
Ensure wall & floor in installation area are level, flat and capable of supporting the product weight.
Flush should be calibrated using restrictor washers (supplied) to balance flush quality and splashing.
Ensure the pan is installed level and flat.
The use of scouring pads or abrasive and harsh chemical cleaning agents should be avoided. The use of warm soapy water is recommended for cleaning.

REFERENCE DIMENSIONS

BONDED SEAT OPTION

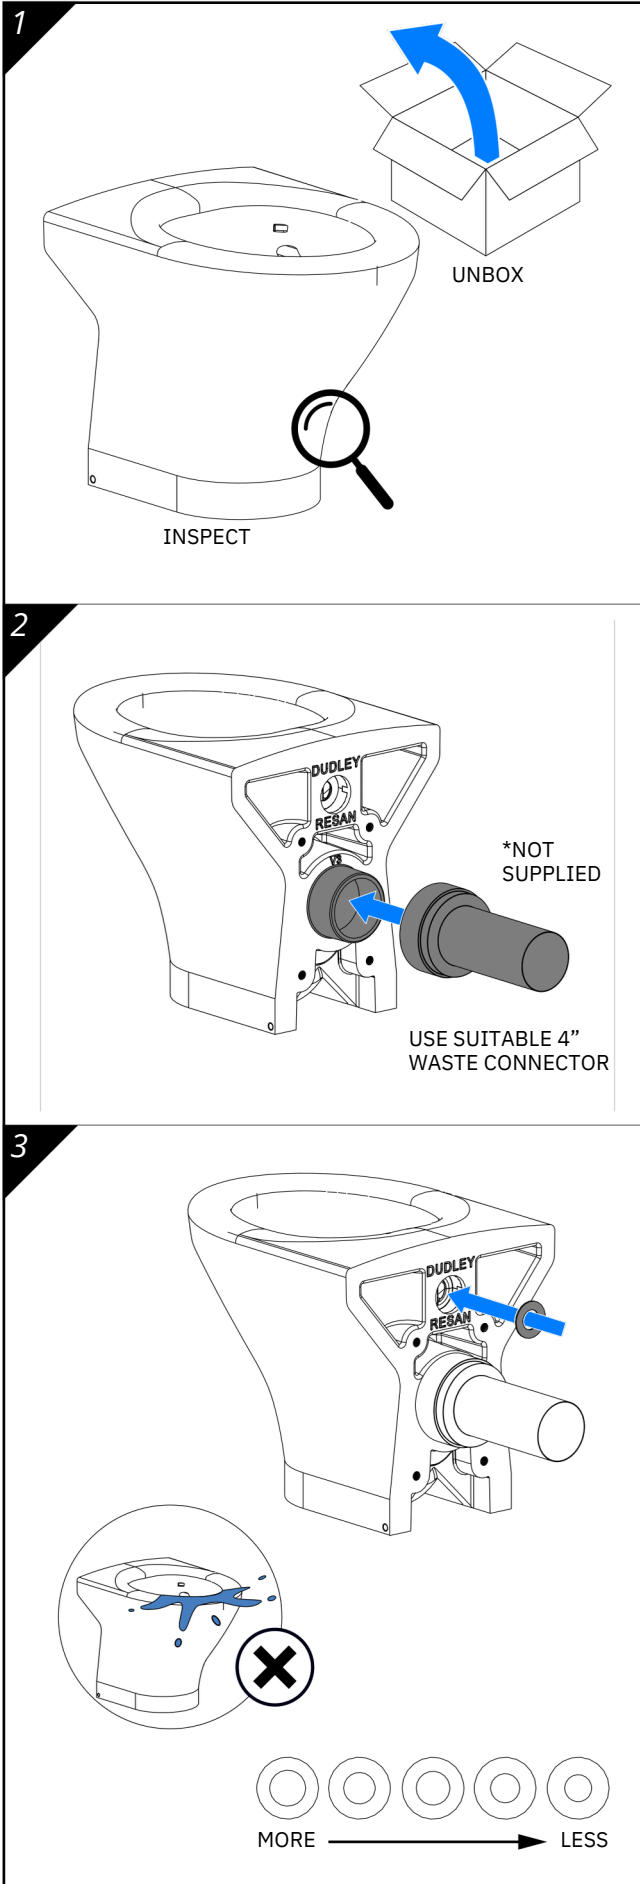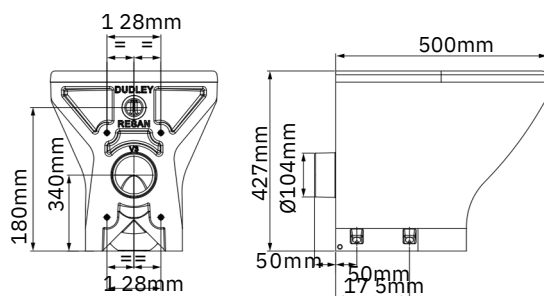


4

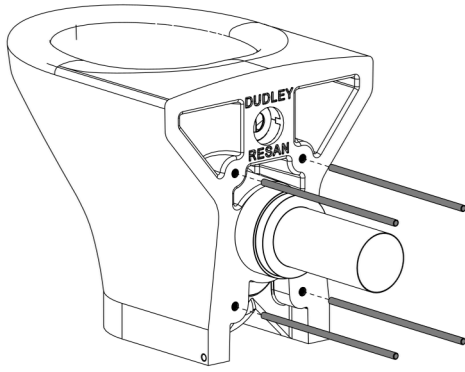

300mm x M10
ALL THREAD

5a STANDARD PAN

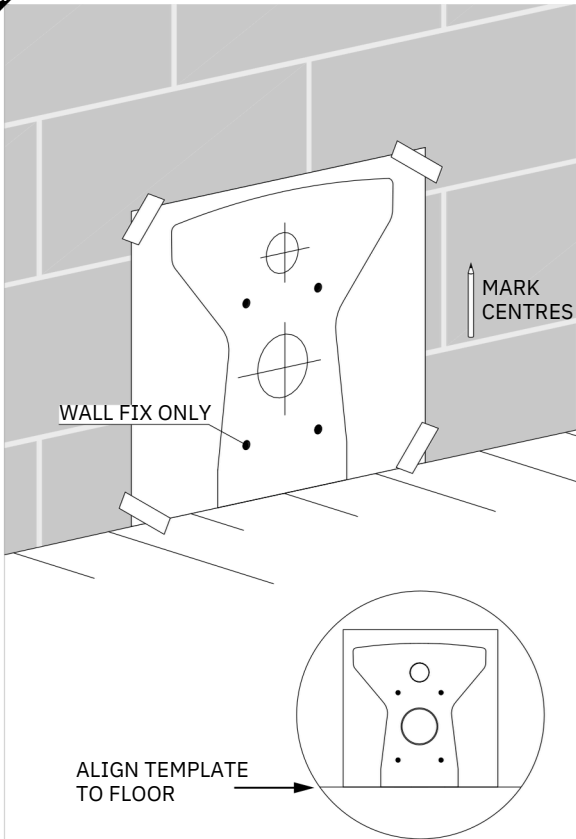

6a STANDARD PAN

